

Slimline Vacuum Lifter PFHL89

Super Slim & Strong Lifter

Being super slim and strong is what makes the PFHL89 vacuum lifter perfect for lifting between a building envelope and scaffold.

Despite measuring only 188mm wide, the slender PFHL89 comes with a steady 455kg lifting capacity making it a convenient aid for lifting glass, ceramic, metal and non-porous materials.

The PFHL89 comes with manual 180° rotation which is lockable in 3 positions, alongside 90° manual tilt.



Key Features

- Capacity: 455kg
- Dual circuit vacuum system with reserve tank, non-return valve and vacuum gauge for each circuit
- 90° manual tilting from horizontal to vertical
- Manual 180° lockable rotation
- Integral maintenance-free vacuum pump
- 12v rechargeable battery with integral 110v or 240v charger and battery energy gauge
- Audio-visual low vacuum warning
- On-board control panel



Vacuum gauge for each circuit



Tilt & rotate handles



Two vacuum tanks




On-board control panel



455kg

Safe Working Load

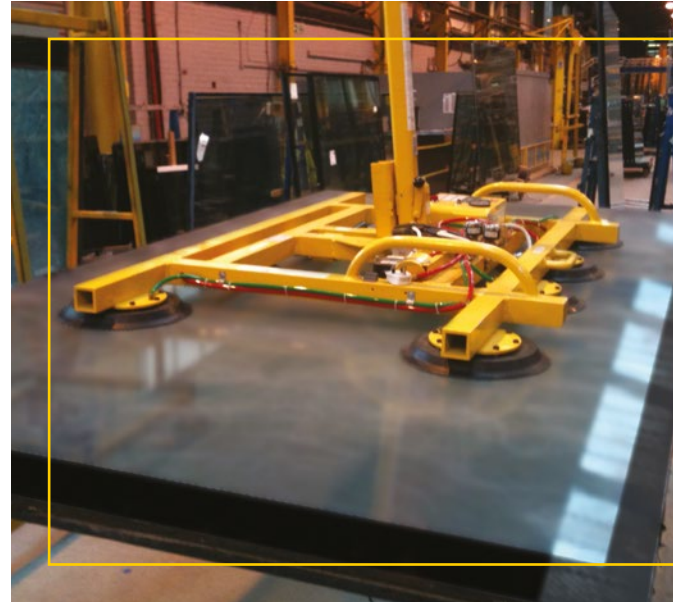

Technical Specifications

Safe working load	capacity:	455kg <small>(smooth, clean surface at 60% vacuum)</small>
Number of suction cups	cups:	8
Suction cup	description:	black rubber, not abrasion resistant.
Suction cup diameter	diameter:	240mm
Suitable for lifting	material properties:	gastight / non-porous
	surface:	smooth
	example:	glass, plastic boards, ceramic plates, sheet metals, coated boards
Weight of lifter	approx:	59kg
Depth of lifter	depth:	188mm
Rotation	rotation:	90° manual left & right lockable
Tilt	tilt:	90° manual
Vacuum system	dual circuit:	1 pump, 2 vacuum reserve tanks
Voltage	pump:	12v DC from rechargeable battery
	battery charger:	110v/240v 50/60Hz single phase factory selectable
Optional accessories	optional	<ul style="list-style-type: none"> • Stone pads (455kg) • Curved pads (455kg capacity)

Technical Data (mm)

